


轴径 Shaft Diameter	轴承型号 Bearing Designation		重量 Mass 近似 Approx	外形尺寸 Boundary Dimensions			基本额定负荷 Basic Load Rating	
	现行的 Current	原型号 Original Code		Fw	D	C	动 Cr Dynamic	静 Cor Static
mm			g	mm				
8	KZK8×12×8	19242/8	1.9	8	12	8	4700	4580
10	KZK10×14×10	29242/10	3.3	10	14	10	5000	5160
12	KZK12×15×13	49241/12	3.6	12	15	13	5300	7400
	KZK12×16×10	29242/12	3.5	12	16	10	6100	6900
	KZK12×17×10	19243/12	5	12	17	10	7020	7020
	KZK12×18×10	19242/12	7.8	12	18	10	7400	7200
14	KZK14×18×10	29241/14	4	14	18	10	7100	8500
	KZK14×19×10	19242/14	5.5	14	19	10	7300	7600
	KZK14.4×20.4×10		6.5	14.4	20.4	10	8100	7800
15	KZK15×19×9		5	15	19	9	6800	7100
	KZK15×19×10	29241/15	6	15	19	10	7200	8400
	KZK15×20×10	19242/15	7.5	15	20	10	7800	9100
	KZK15×21×10		8.5	15	21	11	8400	10500
	KZK15×21×11		9.5	15	21	11	8500	10700
	KZK15.2×22.2×12		11.5	15.2	22.2	12	8600	11100
16	KZK16×20×10	29241/16	5.8	16	20	10	8200	9200
	KZK16×21×10	19242/16	5.8	16	21	10	8800	9800
	KZK16×22×12	19243/16	9.5	16	22	12	11000	11900
17	KZK17×21×10	29241/17	6.7	17	21	10	7600	9000
	KZK17×23×11		9.5	17	23	11	8100	11300
18	KZK18×22×10	29241/18	6.9	18	22	10	7600	9800
	KZK18×22×24		7.2	18	22	24	10100	17200
	KZK18×24×11.6	19243/18	10	17	24	11.6	11600	13100
	KZK18×24×13.3		12.4	18	24	13.3	9000	10700
	KZK18×24×15	29243/18	14	18	24	15	13200	15500
19	KZK19×28×14		20	19	28	14	12100	15000
20	KZK20×25×16		12	20	25	16	9000	12300
	KZK20×26×12	19243/20	9.6	20	26	12	10100	12500

-0.20

TN=塑料保持架，允许工作温度：120°C连续，180°C短期，宽度偏差-0.55mm，脂润滑极限转速为表列数值的60%，特殊要求订货时说明。

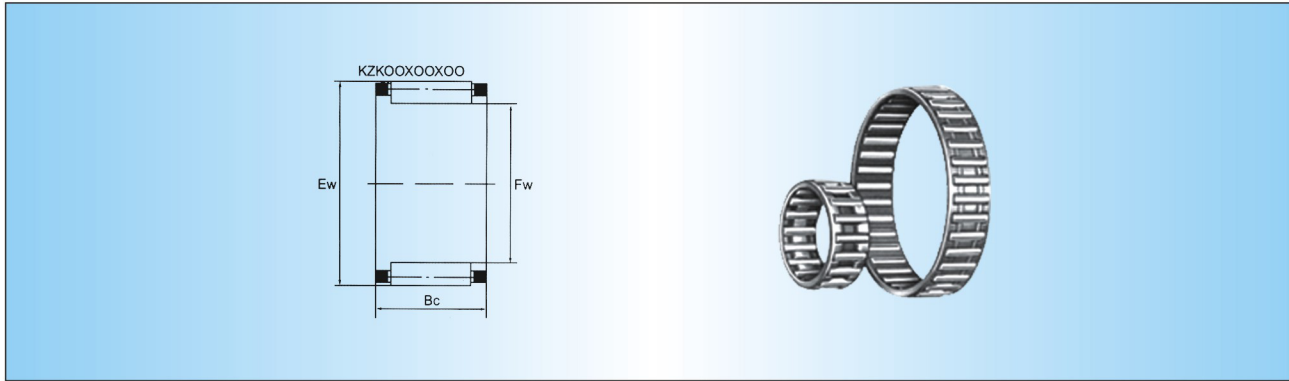

轴径 Shaft Diameter	轴承型号 Bearing Designation		重量 Mass 近似 Approx	外形尺寸 Boundary Dimensions			基本额定负荷 Basic Load Rating	
	现行的 Current	原型号 Original Code		Fw	D	C	动 Cr Dynamic	静 Cor Static
mm			g	mm				
22	KZK22×28×13		15	22	28	13	11900	16500
	KZK22×28×16	29243/22K	18	22	28	16	14400	20100
	KZK22×29×15		15.2	22	29	15	17800	21800
	KZK22×30×16	SZ/432	25.7	22	30	16	18700	22300
23	KZK23×29×13		12	23	29	13	10000	11300
	KZK23×30×14		19.4	23	30	14	9350	10100
23.1	KZK23.1×28.1×14	29242/23.1	12.9	23.1	28.1	14	10600	15800
24	KZK24×30×16		17	24	30	15	11200	13700
	KZK24×30×28		18	24	30	16	11200	13700
25	KZK25×30×28	69245/25	24	25	30	28	13300	15200
	KZK25×31×12	19243/25K	16	25	31	12	8700	8800
	KZK25×31×20	49243/25	26	25	31	20	9700	10600
	KZK25×32×16	19244/25	22.7	25	32	16	18200	23100
25.1	KZK25.1×30.1×14		14.1	25.1	30.1	14	13700	19000
26	KZK26×34×16	9248/26	25	26	34	16	11700	17500
28	KZK28×33×14		15.7	28	33	14	13200	21900
	KZK28×34×14		20	28	34	14	16500	20700
	KZK28×35×15		25	28	35	15	18000	22000
	KZK28×36×16		29.1	28	36	16	19500	27000
	KZK28×38×13.6		40	28	38	13.6	17300	20300
30	KZK30×36×16		28.5	30	36	16	18900	22800
	KZK30×37×16	19243/30	29	30	37	16	21500	30500
	KZK30×38×16		34.4	30	38	16	22700	32600
32	KZK32×40×22	19244/32K	50	32	40	22	27800	39300
	KZK32×42×20		54	32	42	20	29000	41000
35	KZK35×42×20	29243/35	10	35	42	20	26000	40200
38	KZK38×46×20	19244/38	50	38	46	20	31100	43000
40	KZK40×48×17		50	40	48	17	29000	39000

-0.20

TN=塑料保持架，允许工作温度：120°C连续，180°C短期，宽度偏差-0.55mm，脂润滑极限转速为表列数值的60%，特殊要求订货时说明。



轴径 Shaft Diameter	轴承型号 Bearing Designation		重量 Mass 近似 Approx	外形尺寸 Boundary Dimensions			基本额定负荷 Basic Load Rating	
	现行的 Current	原型号 Original Code		Fw	D	C	动 Cr Dynamic	静 Cor Static
mm			g	mm				
8	KBK8×11×10	39241/8	1.85	8	11	10	3500	4000
	KBK8×12×10	29242/8	2	8	12	10	3700	4100
9	KBK9×12×11.5		2.4	9	12	11.5	4200	4800
	KBK9×12×13	49241/9	2.75	9	12	13	4600	5800
	KBK9×12×14		3.5	9	12	14	4700	5900
	KBK9×13×12	39242/9	4.1	9	13	12	5300	5700
	KBK9×13×12.5		4.9	9	13	12.5	5300	5700
	KBK9×13×13	39242/9	5.1	9	13	13	5350	5600
10	KBK10×13×8	29241/10	2	10	13	8	4000	5000
	KBK10×13×10	39241/10	2.4	10	13	10	4200	5200
	KBK10×13×14.5	59241/10	5.1	10	13	14.5	5400	6600
	KBK10×13×16		5.7	10	13	16	6800	7700
	KBK10×14×10	29242/10	3.4	10	14	10	4400	4600
	KBK10×14×11		4	10	14	11	5200	5700
	KBK10×14×12		4.5	10	14	12	5400	6000
	KBK10×14×12.5		4.85	10	14	12.5	5600	6200
11	KBK10×14×13	39242/10	5.4	10	14	13	5600	6200
11	KBK11×15×17		5	11	15	17	5200	7000
12	KBK12×15×13	49241/12	4.6	12	15	13	5500	7300
	KBK12×15×14.3		5.4	12	15	14.5	5800	7700
	KBK12×15×15	59241/12	5.6	12	15	15	5900	7800
	KBK12×15×16.5		6.2	12	15	16.6	6800	9900
	KBK12×15×17	69241/12	6.3	12	15	17	7000	10000
	KBK12×15×17.5		6.5	12	15	17.5	7000	10000
	KBK12×16×13	39242/12	6.7	12	16	13	6300	7600
	KBK12×16×15	49242/12KY	7.9	12	16	15	7500	9000
	KBK12×16×15.5		8.3	12	16	15.5	7600	10000
	KBK12×16×16	59241/12	8.5	12	16	16	7800	9300
	KBK12×16×17	59242/12	9.2	12	16	17	7900	9400
	KBK12×17×14		8	12	17	14	8000	9500
	KBK12×17×14.3		8.4	12	17	14.3	8000	9500
	KBK12×17×14.8		8.8	12	17	14.8	8300	9800
13	KBK13×17×14.5		7.1	13	17	14.5	8300	10200
	KBK13×17×17.5		8.6	13	17	17.5	9500	12100

-0.20

宽度偏差-0.55mm, 特殊要求订货时说明。



轴径 Shaft Diameter	轴承型号 Bearing Designation		重量 Mass 近似 Approx	外形尺寸 Boundary Dimensions			基本额定负荷 Basic Load Rating	
	现行的 Current	原型号 Original Code		Fw	D	C	动 Cr Dynamic	静 Cor Static
mm			g	mm				
14	KBK14×18×10	29241/14	4.6	14	18	10	6260	7400
	KBK14×18×12		6.6	14	18	12	6380	7570
	KBK14×18×13	39241/14	7.6	14	18	13	7300	8700
	KBK14×18×14		6.33	14	18	14	7400	8800
	KBK14×18×14.5		8	14	18	14.5	7400	8800
	KBK14×18×15	49241/14	8.3	14	18	15	7600	8990
	KBK14×18×16.5		9.6	14	18	16.5	8800	9700
	KBK14×18×17	59241/14	10.1	14	18	17	8900	9800
	KBK14×18×20	69241/14	12	14	18	20	9000	10100
	KBK14×18×21		13	14	18	21	10500	12400
	KBK14×18×22		14	14	18	22	11100	13100
	KBK14×19×17	49242/14K	10.3	14	19	17	11100	13100
15	KBK15×19×10	29241/15Y	5	15	19	10	6500	8600
	KBK15×19×18		11	15	19	18	9900	11300
	KBK15×19×19		12	15	19	19	10100	12800
	KBK15×19×20	69241/15	12.9	15	19	20	11300	15500
	KBK15×20×24	SZ-433	18.6	15	20	24	14100	20000
16	KBK16×20×19		12	16	20	19	11700	16800
	KBK16×20×20	69241/16Y	13.4	16	20	20	12900	17600
	KBK16×20×21		14	16	20	21	12900	17600
	KBK16×20×22		15	16	20	22	13000	18700
	KBK16×21×19	59242/16	16	16	21	19	13000	18700
17.5	KBK17.5×22×16		9.3	17.5	22	16	11000	16300
18	KBK18×22×22		16.9	18	22	22	11500	17700
	KBK18×22×23.5		18	18	22	23.5	11900	19000
	KBK18×22×24		18.4	18	22	24	12000	20000
	KBK18×22×25		19.1	18	22	25	12700	20100
	KBK18×23×21		18	18	23	21	9900	10100
	KBK18×23×23		20	18	23	23	10500	12000
	KBK18×24×20	69242/18	21	18	24	20	20000	25000
20	KBK20×24×30	49243/18	22.1	20	24	30	14900	25500
	KBK20×25×22		19.5	20	25	22	15200	22300
	KBK20×25×25		23	20	25	25	17100	24000

-0.20

宽度偏差-0.55mm, 特殊要求订货时说明。